STEALTH® Metal Detector

KEY FEATURES:

- Contact Reporter Software Included
- Detailed Data Collection
- Digital Signal Processing Technology
- Ultra Sensitive Detection
- AutoTest: Self Diagnostic Testing
- Automatic Calibration
- System Set-Up in Seconds
- Flash Memory Stability
- Multi-Level Password Protection

APPLICATIONS:

- Bakery
- Meats
- Dairy
- Prepared Meals
- Packaged Products
- Pharmaceutical
- Nutraceutical
- Confectionery
- Fresh Foods
- Frozen Foods
- Powders/Grains

AVAILABLE OPTIONS:

BSH Rugged Casing for Harsh Environments

Integrated Vector Conveyor Systems

Contact Communication Software

OVERVIEW:

Stealth metal detectors are custom manufactured to suit any application. The Stealth uses digital signal processing technology and has high sensitivity levels to ensure the detection of the smallest ferrous, non-ferrous and stainless steel contaminants. The built-in data collection software with USB data transfer establishes the Stealth as an effective critical control point complying with stringent HACCP regulations.

THE FORTRESS ADVANTAGE:

- Simple Operation
- Custom built detectors or stock sizes
- "*Never Obsolete*" Commitment: detectors are always upgradable
- Modular design; have fewer components
- Outstanding Reliability
- Exceptional Performance

FORTRESS® TECHNOLOGY

www.fortresstechnology.com

STEALTH® Metal Detector

Custom Aperture Sizes

Powerful Digital Signal Processing (DSP) Technology

Product Library Stores Multiple Product Settings for Easy Recall

Multi-Level Password Protection
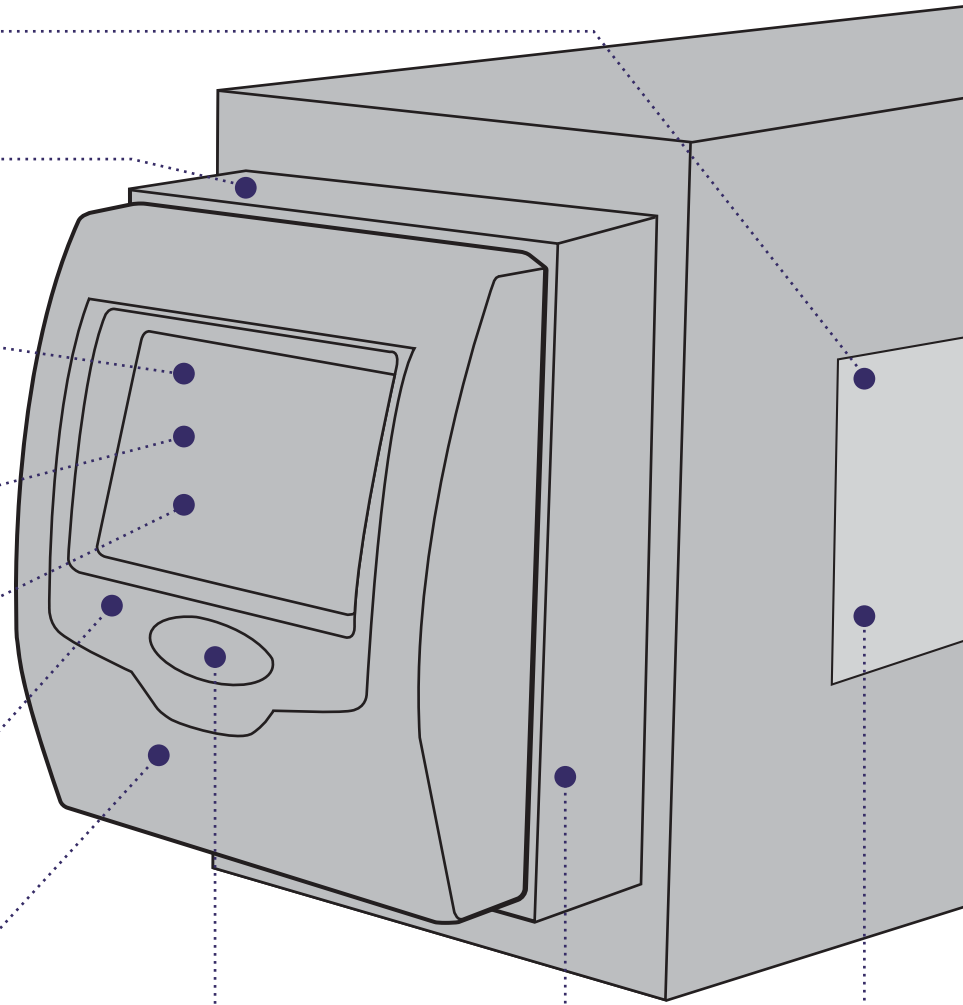
User-Friendly Multi-Language Control Panel Interface

Dual Power / Frequency with Auto-balance and Ultra-sensitivity levels

Automatic QA Testing and Calibration

USB Port for access to QA Reports, Configuration and Firmware Updates

Sleek Modular Design for greater reliability

Aperture Lining Customized to Suit Application

DETECTOR OPTIONS & SPECIFICATIONS:

Construction	Aluminum epoxy painted or Stainless Steel
BSH Extra-Rugged Casing	Vibration immunity and stability in heavy duty applications and harsh environments
Aperture Lining	Epoxy resin for heavy wash down or dry liner for wipe down applications
Rating	Aluminum: Nema 4 / IP65 or Stainless Steel: Nema 4X / IP69K
Remote Mounting	Display panel terminal can be mounted remotely (Up to 4,000 ft / 1,200 m)
Network Communications	RS485, Ethernet / Wireless via Contact Communications Software
Electrical	90-250 v Single phase, 1 amp, 50-60 Hz

Simple Operation.   Outstanding Reliability.   Exceptional Performance.

FORTRESS®
TECHNOLOGY