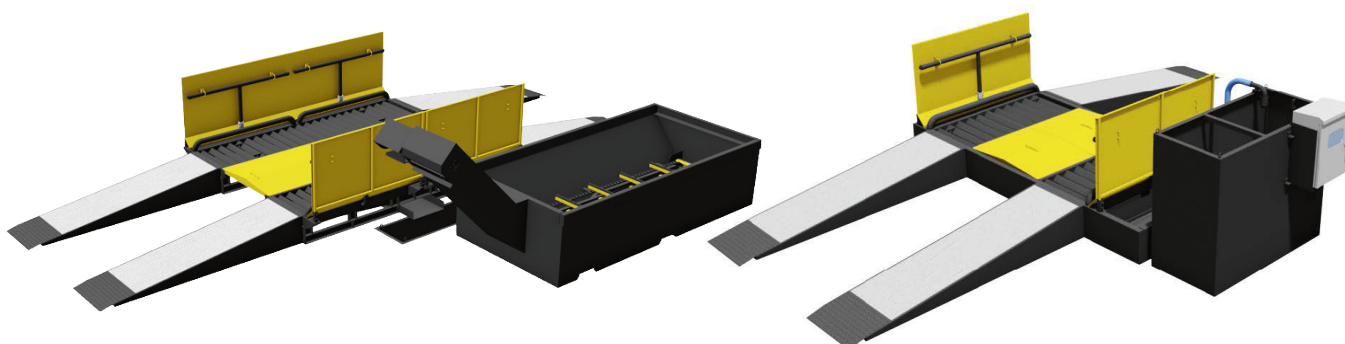# ACCUWASH GX200/400/600 MOBILE
AUTOMATIC DRIVE-THROUGH WHEEL WASH SYSTEM

PRODUCT DESCRIPTION

The AccuWash GX Mobile series are easily relocatable wheel wash systems for constantly changing and dynamic work sites, and are an ideal solution for ensuring your operations are EPA compliant.
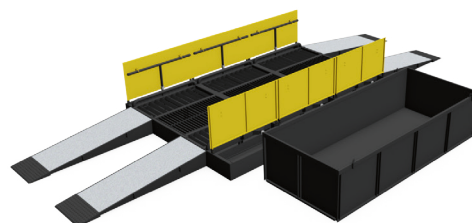

FEATURES

› **Designed for ultimate portability**

› **Automatic operation via photo sensor**

› **Optional automatic sludge discharge by conveyor system**

› **Emergency Stop Button**

› **Available in 2m, 4m, or 6m long versions – network to extend even further**

› **Minimal or no excavation required depending on variant**

SPECIFICATIONS

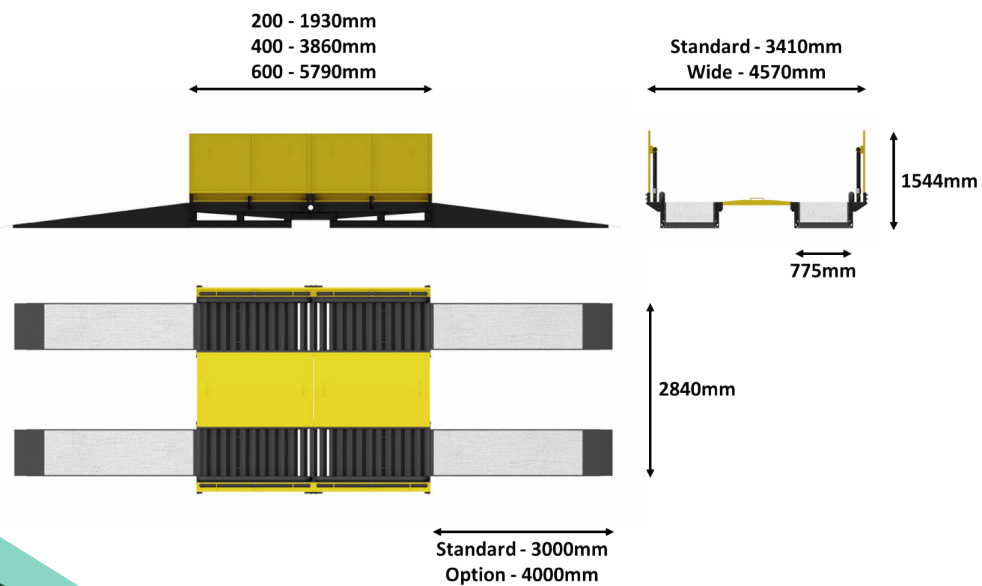|		Standard
Dimensions	200	3410mm (W) x 1939 (L) x 1544 (H)
	400	3410mm (W) x 3860 (L) x 1544 (H)
	600	3410mm (W) x 5790 (L) x 1544 (H)
Maximum Vehicle Width		2800mm
Power Consumption	200	7.75kW
	400	13.25kW
	600	15.25kW
Vehicle Sensing		Single Photo Eye (Additional photo eye and/or magnetic sensor optional)
Submersible Pump	200	5.5kW
	400	2 x 5.5kW
	600	2 x 11kW

UNION MODEL

A variant of the GX200M version which is almost infinitely expandable, and 100% above ground.

SPECIFICATIONS

		Standard
Feedback Pump	200	1.5kW
	400	5.5kW
	600	5.5kW
Water Consumption	200	Approx. 500L per minute
	400	Approx. 1000L per minute
	600	Approx. 1200L per minute
Air Compressor (option)		1.5kw
Scraper Drive Motor (option)		0.75kW
Water Jet Pressure		Approximately 150kPa (22 psi)
Main Power		415VAC x 3-Phase x 50Hz
Water Tank Volume (option)		Conveyor tank with total capacity of 6500L
Nozzle	200	64 total (52 on undercarriage, 12 on side bars)
	400	92 total (68 on undercarriage, 24 on side bars)
	600	156 total (120 on undercarriage, 36 on side bars)
Design Load		7.5t per axle
Side Screen		1144mm
Control Panel		SS304 CE Compliant
Upgrades and Options		• Wash Pump power • Pump Screen & Air Compressor (for back flush on 1.5mm pump screen) • Water Heater • Automatic Flocculant Dosing System (only recommended with conveyor tank option)

DIMENSIONS

200 - 1930mm
400 - 3860mm
600 - 5790mm

Standard - 3410mm
Wide - 4570mm

1544mm

775mm

2840mm

Standard - 3000mm
Option - 4000mm

ACCU WASH