

# ACCUWASH GX200/400/600

## AUTOMATIC DRIVE-THROUGH WHEEL WASH SYSTEM

### PRODUCT DESCRIPTION

The AccuWash GX series are complete wheel wash systems with modular design that can be customised to suit a variety of site requirements, and an ideal solution for ensuring your operations are EPA compliant.



GX400 with Conveyor Tank



GX400 with 10m<sup>3</sup> water tank

### FEATURES

- › Modular design to suit various requirements
- › Automatic operation via photo sensor
- › Optional automatic sludge discharge by conveyor system
- › Emergency Stop Button
- › Available in 2m, 4m, or 6m long versions – network to extend even further
- › Available in standard and wide wheel track versions


### SPECIFICATIONS

		Standard	Wide
Dimensions	200	3410mm (W) x 1939 (L) x 1544 (H)	4570mm (W) x 1939mm (L) x 1544mm (H)
	400	3410mm (W) x 3860 (L) x 1544 (H)	4570mm (W) x 3860mm (L) x 1544mm (H)
	600	3410mm (W) x 5790 (L) x 1544 (H)	4570mm (W) x 5790mm (L) x 1544mm (H)
Maximum Vehicle Width		2800mm	3800mm
Power Consumption	200	7.75kW	13.25kW
	400	13.25kW	24.95kW
	600	15.25kW	32.95kW

## SPECIFICATIONS

		Standard	Wide
<b>Vehicle Sensing</b>		Single Photo Eye (Additional photo eye and/or magnetic sensor optional)	
<b>Submersible Pump</b>	<b>200</b>	5.5kW	11kW
	<b>400</b>	11kW	2 x 11kW
	<b>600</b>	15kW	2 x 15kW
<b>Water Consumption</b>	<b>200</b>	Approx. 500L per minute	Approx. 1000L per minute
	<b>400</b>	Approx. 1000L per minute	Approx. 2000L per minute
	<b>600</b>	Approx. 1200L per minute	Approx. 2400L per minute
<b>Air Compressor (option)</b>		1.5kw	1.5kw (2.2kW on 4m & 6m units)
<b>Scraper Drive Motor (option)</b>		0.75kW	
<b>Water Jet Pressure</b>		Approximately 150kPa (22 psi)	Approximately 150kPa (22 psi) & 200kPa on 6m
<b>Main Power</b>		415VAC x 3-Phase x 50Hz	
<b>Water Tank Volume (option)</b>		Conveyor tank with total capacity of 6500L	Conveyor tank with total capacity of 8000L
<b>Nozzle</b>	<b>200</b>	64 total (52 on undercarriage, 12 on side bars)	72 total (60 on undercarriage, 12 on side bars)
	<b>400</b>	92 total (68 on undercarriage, 24 on side bars)	104 total (80 on undercarriage, 24 on side bars)
	<b>600</b>	156 total (120 on undercarriage, 36 on side bars)	176 total (140 on undercarriage, 36 on side bars)
<b>Design Load</b>		7.5t per axle	0.75kW
<b>Side Screen</b>		1144mm	0.75kW
<b>Control Panel</b>		SS304 CE Compliant	
<b>Upgrades and Options</b>		<ul style="list-style-type: none"> <li>Galvanized Frame (Grating)</li> <li>Centre grating (standard is sheet steel)</li> <li>Wash Pump power</li> <li>Pump Screen &amp; Air Compressor (for back flush on 1.5mm pump screen)</li> <li>Water Heater</li> <li>Automatic Flocculant Dosing System</li> <li>Conveyor Tank (standard or extended chute)</li> </ul>	

## DIMENSIONS

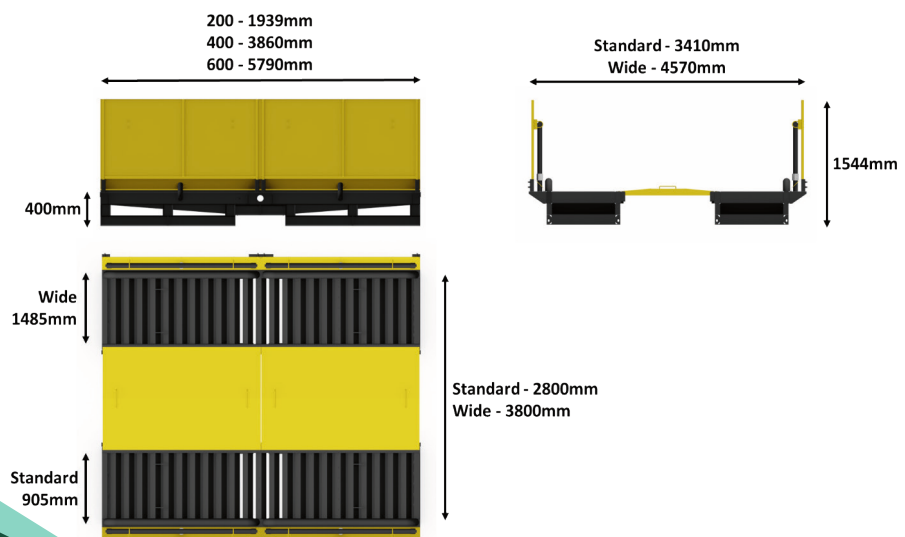

All Branches T: 1300 069 970  
 NSW (Sydney)  
 VIC (Melbourne South)  
 VIC (Melbourne North)  
 QLD (Brisbane)  
 WA (Perth)  
 SA (Adelaide) & NT

accuwash.com.au

